
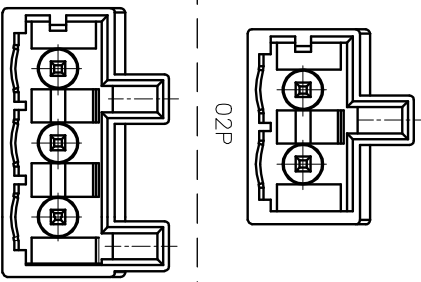
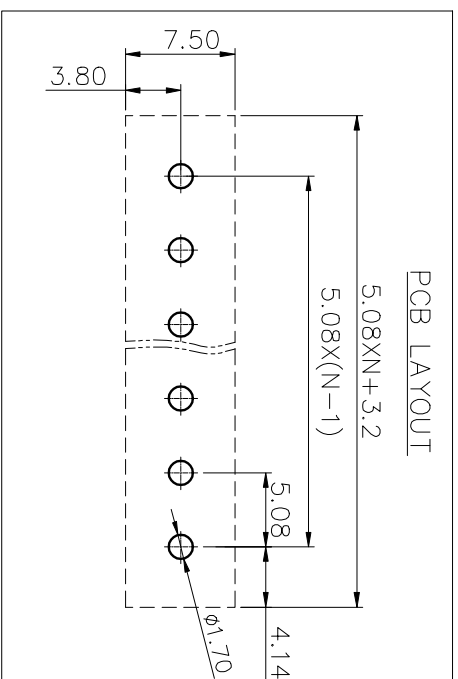

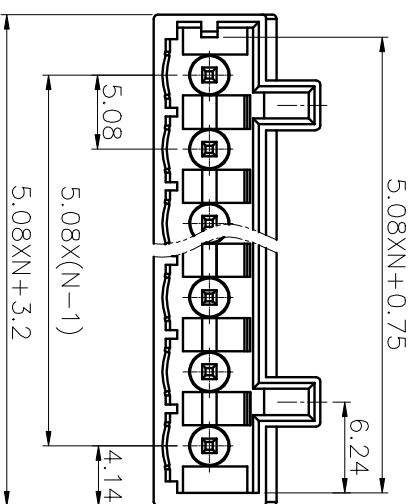
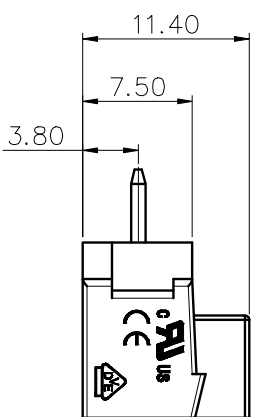


公差等级/General	Tolerances(mm)										0.1/10		
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.250	>.315	>.400	±Z
~	~	~	~	~	~	~	~	~	~	~	~	>500	
3	~	6	10	18	30	50	80	120	180	250	315	400	500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

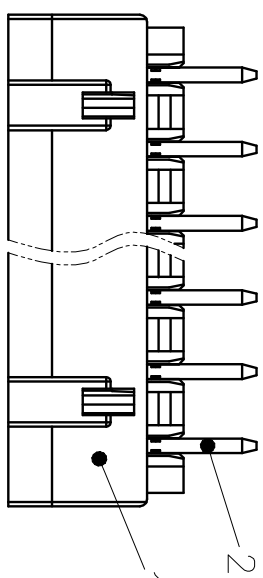

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:	III/3 III/2 II/2		
过压类别 / Overvoltage Category / 污染等	III/3 III/2 II/2		
额定电压/电涌 / Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压 / Rate Impulse Voltage (kV)	4	/	/
间距 / Pitch (mm) / 线数 / Poles	7.50/N=02~12P		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合 RoHS 标准 / Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
8EDGVCB-5.08-XXP-11-01A(H)

DRAWING NO.: 8EDGVCB-5.08-C02
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 REV T0
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE