


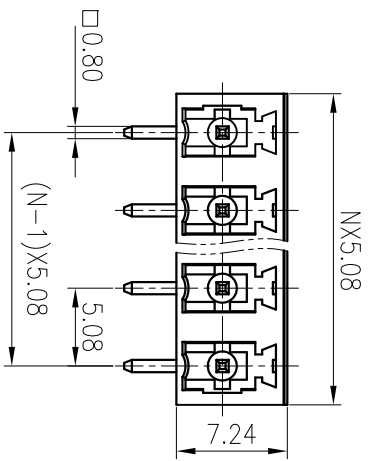


公差 (mm)		公差 (mm)	
0	>3	>6	>10
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	0.1/10	0.1/10	0.1/10
±2	±2	±2	±2



PCB LAYOUT

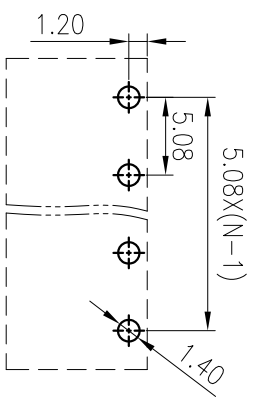

2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流 /Rated Voltage(V)/Current(A) 300/8 / 300/10			
IEC 标准/IEC Standard: / /			
过压类别/Overvoltage Category/污染等级/Pollution Degree II /2			
额定电压/电流 /Rated Voltage(V)/Current(A) 450/7			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) 4.0			
间距/Pitch(mm)/线数范围/Poles 5.08/N=02~12P			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

SURFACE: /

MATERIAL:				
MAT NO.:	/			
STATUS:	/			
APPD: LanChH	2020.03.19			
CHKD: YUJZ	2020.03.19			
DRFT: HZD	2015.08.24			
REV	ECN	DESCRIPTION	DRFT	DATE

DEGSON® 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD
 NAME: 15EDGRC-5.08-XXP-1Y-00A(H)
 DRAWING NO.: 15EDGRC-5.08-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1